

Cable Ties

Screw Mounted





- **Material:**
- **Application:**
- **Operating Temperature:**

UL approved Nylon 66, 94V-2.

The cable tie can be secured to a panel using a single screw.

-40°C to +85°C.

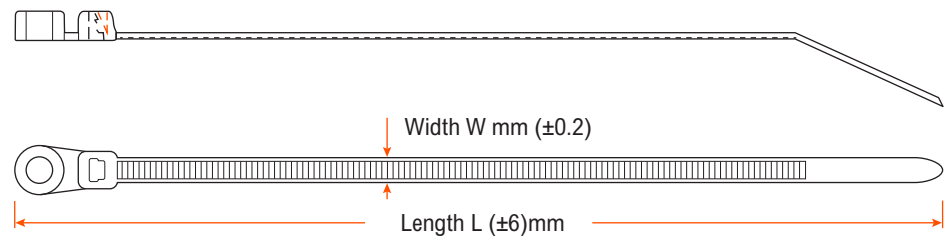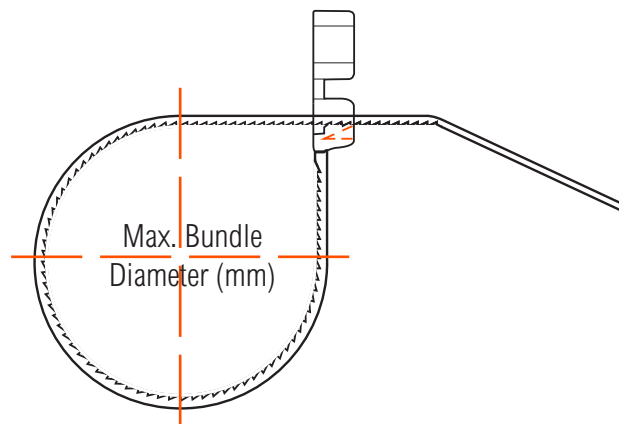

See product technical table
on next page

Cable Ties

Screw Mounted

Item No.	Colour	Width W (mm)	Length L (mm)	Screw	Max. Bundle Diameter (mm)	Min. Tensile Strength (kg)
SMCT25x110-B	Black	2.5	110	M3	25	8
SMCT36x150-B	Black	3.6	171	M4	36	18
SMCT48x200-B	Black	4.8	219	M5	52	22
SMCT48x300-B	Black	4.8	300	M5	85	22
SMCT48x370-B	Black	4.8	370	M5	102	22
SMCT76x300-B	Black	7.6	300	M5	85	54
SMCT76x400-B	Black	7.6	380	M6	112	54
SMCT25x110-N	Natural	2.5	110	M3	25	8
SMCT36x150-N	Natural	3.6	171	M4	36	18
SMCT48x200-N	Natural	4.8	219	M5	52	22
SMCT48x300-N	Natural	4.8	300	M5	85	22
SMCT48x370-N	Natural	4.8	370	M5	102	22
SMCT76x300-N	Natural	7.6	300	M5	85	54
SMCT76x400-N	Natural	7.6	380	M6	112	54

STORAGE AND USAGE OF NYLON CABLE TIES

Krimpterm cable ties are made from high quality Nylon 66 resin. Moisture absorption is an essential factor for this material to retain its strength and maintain optimal performance. To this end, it is important for the cable ties to be kept in a sealed package wherever possible.

Below are some helpful storage suggestions:

1. The ideal storage temperature is around 23°C with the humidity over 50%.
2. Do not open the bag before use. Please try to finish the whole package of cable ties shortly after opening or reseal the bag until you are ready to use again.
3. Do not expose directly under sunlight (except UV weather resistant cable ties).
4. Avoid storing cable ties close to warm objects (such as heaters).